

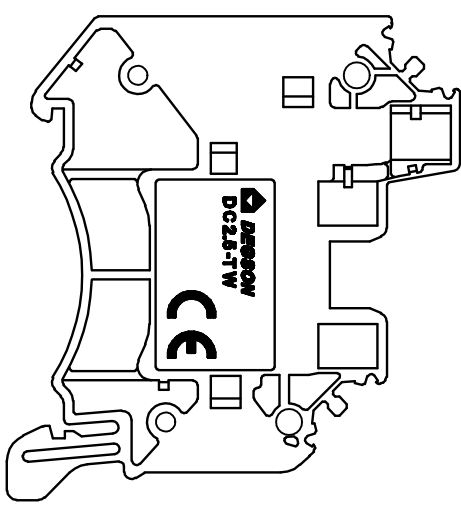



REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

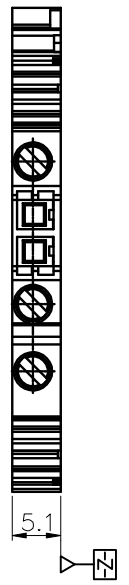

DC2.5-TW-01P-1Y-00A(H)  
 (RoHS)  
 00A-(Standard)  
 (Color): 1.(Grey)  
 2.(Blue)  
 3.(Black)  
 4.(Green)  
 5.(Orange)  
 6.(Red)  
 7.(Transparent)  
 8.(Yellow)  
 9.(White)

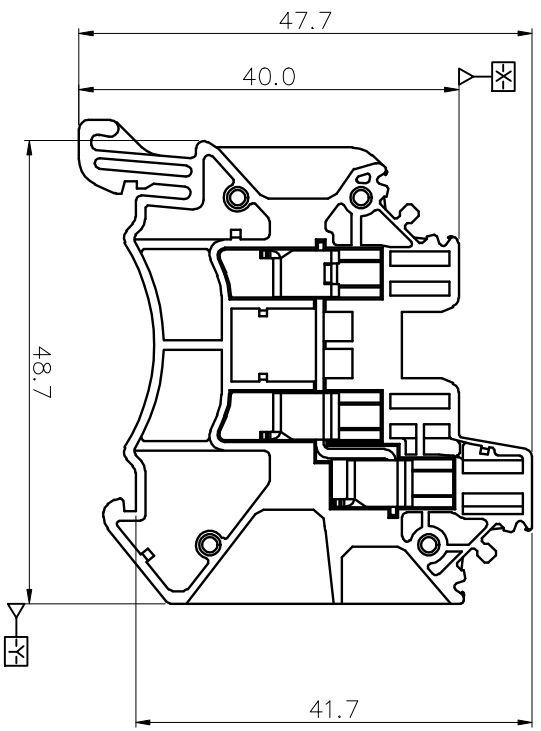

NOTES1:

- 1. Rated voltage/current : 600V / 20A
- 2. Withstanding voltage : AC2200V/1Min.
- 3. Torque value : M2.5 , 4.43l.b.in
- 4. Wire range : 22~12AWG

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Stripping length : 10mm
- 3. Operating temperature: -40°C~+105°C
- 4. Undimensioned tolerances:

IEC Standard

Pollution degree	3
Overvoltage category	III
Rate Impulse voltage(KV)	8KV
Rate voltage(V)	1000V
Rate current(A)	24A

5.RoHS Compliance

Pitch	Range	In	Nominal	Dimension	Range		
mm		mm	mm				
Over	Over	Over	Over	Over	Over	Over	Over
TO	TO	TO	TO	TO	TO	TO	TO
6	10	24	30	80	100	150	150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30
							±2°

- 2. Torque value : M2.5 , 0.5N·m
- 3. Wire range : 0.2~2.5mm<sup>2</sup>&4mm<sup>2</sup>(sol)

DETACHED LISTS			
PART NO.:	/	NAME:	<b>DESSON</b> 宁波德森电子有限公司 NINGBO DESSON ELECTRICAL CO., LTD
APPD:	/	TITLE:	CUSTOMER DRAWING
CHKD:	/	DRAWING NO.:	/
DRFT:	/	REV	DO
THIRD ANGLE PROJECTION		SHEET	1/1
		SCALE	1:1

A 8 7 6 5 4 3 2 1