

Retro-Reflex Sensor

LN89PA3

Part Number




- Good positioning accuracy
- Min. clearance to reflector: 0 mm
- Single-lens optic
- Stainless steel plug (V2A)

Technical Data


Optical Data	
Range	5500 mm
Reference Reflector/Reflex Foil	RQ100BA
Switching Hysteresis	< 15 %
Light Source	Red Light
Polarization Filter	yes
Service Life (T = +25 °C)	100000 h
Max. Ambient Light	10000 Lux
Opening Angle	5 °
Single-Lens Optic	yes
Electrical Data	
Supply Voltage	10...30 V DC
Current Consumption (U _b = 24 V)	< 40 mA
Switching Frequency	1 kHz
Response Time	500 µs
Temperature Drift	< 10 %
Temperature Range	-10...60 °C
Switching Output Voltage Drop	< 2,5 V
PNP Switching Output/Switching Current	200 mA
Residual Current Switching Output	< 50 µA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Protection Class	III
Mechanical Data	
Setting Method	Potentiometer
Housing Material	Plastic
Full Encapsulation	yes
Degree of Protection	IP67
Connection	M12 × 1; 4-pin
PNP NO/NC antivalent	●
Connection Diagram No.	101
Control Panel No.	N1 No1
Suitable Connection Technology No.	2
Suitable Mounting Technology No.	350

A reflector must be used in combination with these sensors. They can be installed in all kinds of industrial environments thanks to ample functional reserve. Even reflective objects can be reliably recognized through the use of polarized light.

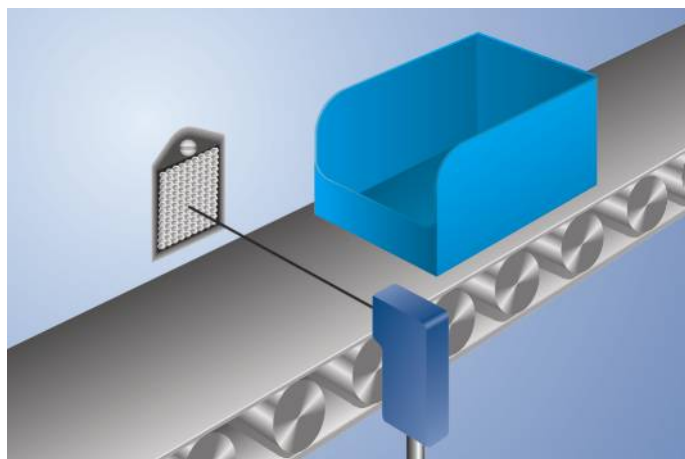


Complementary Products


Dust extraction tube STAUBTUBUS-03
PNP-NPN Converter BG2V1P-N-2M
Protection Housing Set ZSN-NN-02
Reflector, Reflex Foil

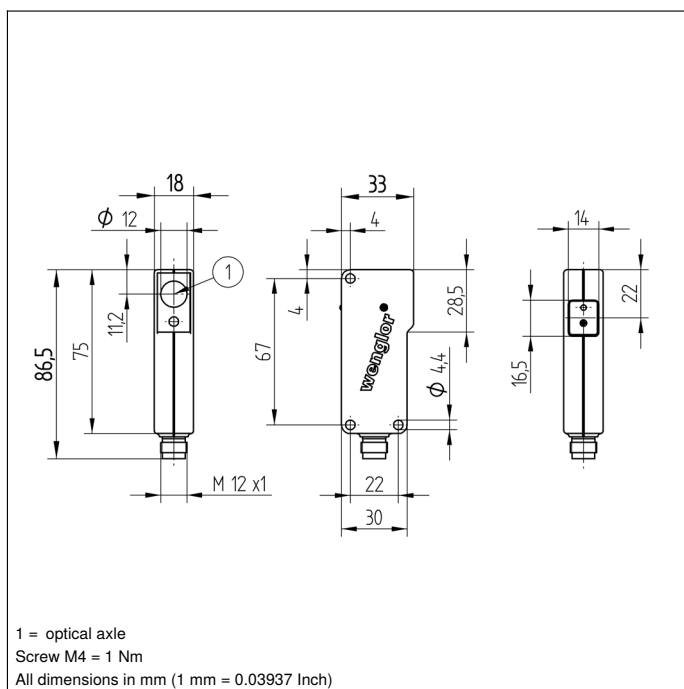


Ctrl. Panel



Optic



05 = Switching Distance Adjuster
30 = Switching Status/Contamination Warning

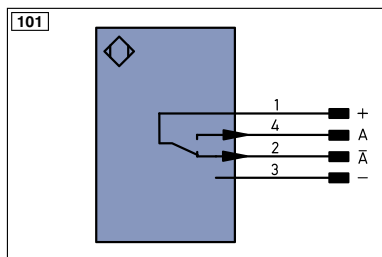

Legend

+	Supply Voltage +	PT	Platinum measuring resistor
-	Supply Voltage 0 V	nc	not connected
~	Supply Voltage (AC Voltage)	U	Test Input
A	Switching Output (NO)	U	Test Input inverted
A̅	Switching Output (NC)	W	Trigger Input
V	Contamination/Error Output (NO)	O	Analog Output
V̅	Contamination/Error Output (NC)	O-	Ground for the Analog Output
E	Input (analog or digital)	BZ	Block Discharge
T	Teach Input	AWV	Valve Output
Z	Time Delay (activation)	a	Valve Control Output +
S	Shielding	b	Valve Control Output 0 V
RxD	Interface Receive Path	SY	Synchronization
TxD	Interface Send Path	E+	Receiver-Line
RDY	Ready	S+	Emitter-Line
GND	Ground	±	Grounding
CL	Clock	SnR	Switching Distance Reduction
E/A	Output/Input programmable	Rx+/-	Ethernet Receive Path
IO-Link	IO-Link	Tx+/-	Ethernet Send Path
PoE	Power over Ethernet	Bus	Interfaces-Bus A(+)/B(-)
IN	Safety Input	La	Emitted Light disengageable
OSSD	Safety Output	Mag	Magnet activation
Signal	Signal Output	RES	Input confirmation
BI-D+/-	Ethernet Gigabit bidirect. data line (A-D)	EDM	Contact Monitoring
EN0 RS422	Encoder 0-pulse 0-0 (TTL)	EN422	Encoder A/A̅ (TTL)
		EN422	Encoder B/B̅ (TTL)

ENa	Encoder A
ENb	Encoder B
AMIN	Digital output MIN
AMAX	Digital output MAX
AOK	Digital output OK
SY In	Synchronization In
SY OUT	Synchronization OUT
LI	Brightness output
M	Maintenance

Wire Colors according to DIN IEC 757

BK	Black
BN	Brown
RD	Red
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink
GNYE	Green/Yellow

Feasible reflector distance

Reflector type, mounting distance

RQ100BA	0...5,5 m	RR25KP	0...1,1 m
RE18040BA	0...2,7 m	RR21_M	0...1,2 m
RQ84BA	0...4,5 m	ZRAE02B01	0...2,2 m
RR84BA	0...4,5 m	ZRME01B01	0...0,7 m
RE9538BA	0...1,4 m	ZRME03B01	0...2,4 m
RE6151BM	0...4 m	ZRMR02K01	0...1 m
RR50_A	0...3,5 m	ZRMS02_01	0...1,1 m
RE6040BA	0...4 m	RF505	0...1,6 m
RE8222BA	0...1,7 m	RF508	0...1,6 m
RR34_M	0...2,4 m	RF258	0...1,4 m
RE3220BM	0...1,5 m	ZRDF03K01	0...3,5 m
RE6210BM	0...1,4 m	ZRDF10K01	0...4 m
RR25_M	0...1,7 m		

