

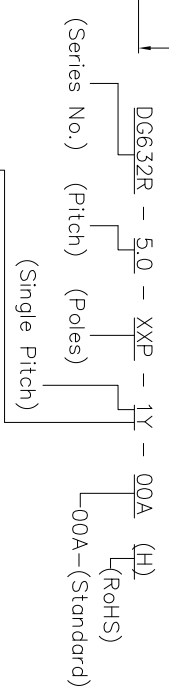
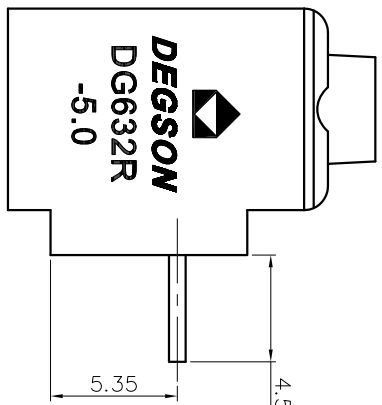
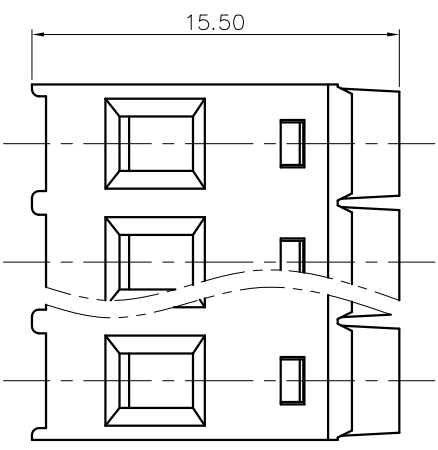
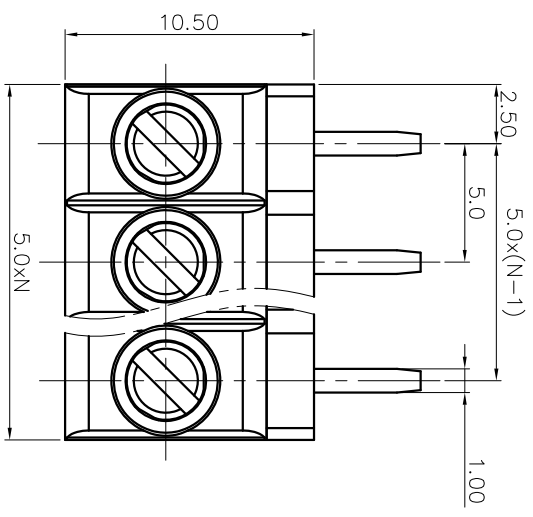


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

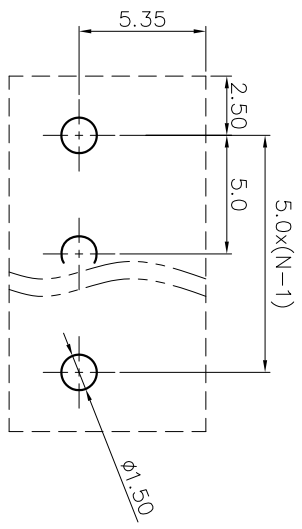

(Color) : 1.(Grey)2.(Blue)3.(Black)4.(Green)5.(Orange)  
 6.(Red)7.(Transparent)8.(Yellow)9.(White)

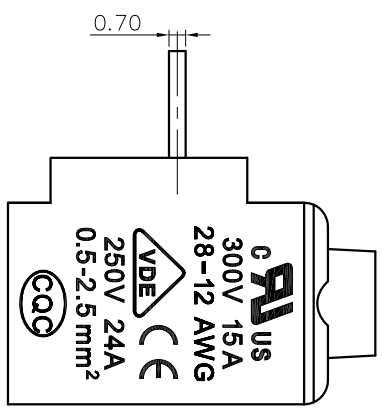

- NOTES1:  
 UL Standard  
 1.Rated Voltage/Current : 300V / 15A  
 2.Torque Value : M2.5 , 0.4N.m  
 3.Wire Range : 28~12AWG  
 IEC Standard  
 1.Rated Voltage/Current : 250V / 24A  
 2.Torque Value : M2.5 , 0.4N.m  
 3.Wire Range : 0.5~2.5mm<sup>2</sup>
- NOTES2:  
 1.Dimension shall be interpreted per ASME Y14.5-2009  
 2.Pitch : 5.0mm, Poles : N=02~20P  
 3.Stripping length : 5~6mm  
 4.Withstanding Voltage : AC2000V/1Min.  
 5.Operating temperature : -40°C~+105°C  
 6.Undimensioned Tolerances:

Pitch range in mm	Nominal dimension range		Over	Over	Over	Over	Over
	Over	In mm					
6	TO	TO	30	60	100	150	0.1/10
10	TO	TO	30	60	100	150	0.1/10
24	TO	TO	60	100	150	150	0.1/10
30	TO	TO	60	100	150	150	0.1/10
60	TO	TO	60	100	150	150	0.1/10
100	TO	TO	60	100	150	150	0.1/10
150	TO	TO	60	100	150	150	0.1/10

7.RoHS Compliance

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	CHKD:	/
DRFT:	/	TITLE:	CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:	/
		DO NOT SCALE DRAWING	SCALE
			1:1

A 8 7 6 5 4 3 2 1